ISO 9001 Registered | ASME Certified

Advanced Pneumatic Conveying Systems
Controlled Injection Systems
Inflatable Seat Valve
Process Engineering



Cost Effective

Minimized Maintenance

Decreased Downtime

Seamless Integration

Fully Customizable

Phone: +1 (865) 984-5286


Fax: +1 (865) 977-4131

The Pinch Type Switch Valve is used as a diversion or conversion mechanism in the convey transfer process. It is self-supporting in the conveying line and unless otherwise stated, should be positioned in the vertical rise of the pipe route. The valve is controlled from pneumatically operated solenoids that energizes inflatable bladders for a two-branch application directing material to multiple reception points. The pinch valve is supplied with a heavy-duty abrasion resistant neoprene sleeve and rated for a maximum conveying line pressure of 4barg. For food grade applications, the elastomer is FDA approved. The PV Switch Valve is constructed from heavy plate material and the design allows reliable performance for handling large tonnages of abrasive materials. The valve can be controlled automatically by the dense phase system's PLC or communicate to another PLC with remote I/O.

- Temperature rating up to < 400°F (204°C)
- Pressure rating up to 57psig (4barg)
- Standard material 516 Gd70 carbon steel
- Available in 304/316 stainless steel, aluminum, galvanized, and others
- Food grade, FDA, and pharmaceutical finishes and coatings
- Industrial coatings such as Teflon®, tungsten carbide, nickel, and others
- Fully assembled and tested prior to shipment
- Global customer support for service and spare parts
- Manufactured in Maryville, TN USA
- ISO 9001:2015 Certified

UK – Mactenn Systems, Ltd. India – Macawber Engineering Systems India, Ltd. Pvt. China – Macawber China ISO 9001 Registered | ASME Certified

Advanced Pneumatic Conveying Systems
Controlled Injection Systems
Inflatable Seat Valve
Process Engineering

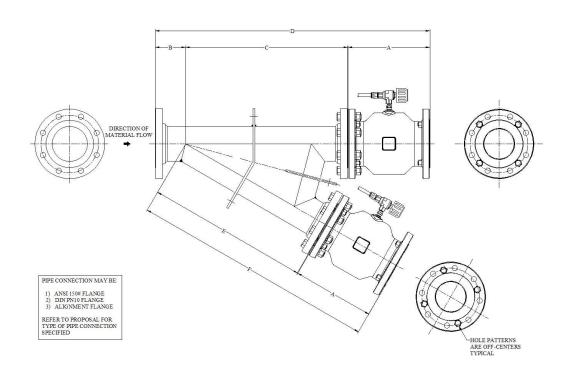

MODEL	DIMENSIONS (INCH)						NET WT
(PIPE SIZE)	Α	В	С	D	E	F	(LBS)
2"	7 3/16"	4 1/16"	18 7/8"	30 3/16"	18 7/8"	26 1/8"	105
3"	8 15/16"	5 1/8"	19 11/16"	33 13/16	19 11/16"	28 11/16"	117
4"	10 9/16"	3 15/16"	20 7/8"	35 7/16"	20 13/16"	31 7/16"	123
5"	13 3/4"	5 15/16"	22 7/16"	42 3/16"	22 7/16"	36 1/4"	194
6"	16 7/16"	5 15/16"	25 9/16"	48"	25 5/8"	42 1/8"	344

INFORMATION NOT CERTIFIED FOR INSTALLATION PURPOSES

UK – Mactenn Systems, Ltd.
India – Macawber Engineering Systems India, Ltd. Pvt.
China – Macawber China

Phone: +1 (865) 984-5286

Fax: +1 (865) 977-4131